



BSI Standards Publication

Specifications for use of poly(lactic acid) based filament in additive manufacturing applications

National foreword

This British Standard is the UK implementation of [ISO 5425:2023](#).

The UK participation in its preparation was entrusted to Technical Committee PRI/89, Plastics - Environmental Aspects.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2023
Published by BSI Standards Limited 2023

ISBN 978 0 539 15532 7

ICS 25.030; 83.080.01

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2023.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

ISO
5425

First edition
2023-08-23

Specifications for use of poly(lactic acid) based filament in additive manufacturing applications

Spécifications pour l'utilisation de filaments à base de poly(acide lactique) dans les applications de fabrication additive



Reference number
ISO 5425:2023(E)



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Labelling	2
5 Requirements	3
5.1 Appearance.....	3
5.2 Specification.....	3
5.2.1 Diameter and ovality tolerance.....	3
5.2.2 Net mass and tolerance.....	3
5.2.3 Volatile matter limit.....	3
5.2.4 Biobased (carbon) content.....	4
5.2.5 Carbon and environmental footprint.....	4
5.3 Property requirements.....	4
5.4 Limit quantity of substances and impurities.....	4
6 Test methods	4
6.1 Conditioning.....	4
6.2 Appearance of filament material.....	4
6.3 Diameter and ovality of filament material.....	4
6.4 Net mass and tolerance of filament material.....	5
6.5 Melt mass-flow rate.....	5
6.6 Moisture content.....	5
6.6.1 General.....	5
6.6.2 Method A.....	5
6.6.3 Method B.....	5
6.6.4 Method C.....	5
6.7 Tensile load and elongation at break of filament.....	5
6.8 Impurities limit.....	6
6.9 Volatile matter limit.....	6
6.10 Biobased (carbon) content.....	6
6.11 Carbon and environmental footprint.....	6
6.12 End-of-life options.....	6
6.13 Discharge ability.....	6
7 Verification	6
7.1 General.....	6
7.2 Sampling.....	6
7.2.1 General.....	6
7.2.2 Determination of acceptability.....	7
7.3 Type inspection.....	7
8 Mark, packaging, transportation and stock	7
8.1 Mark.....	7
8.2 Packaging.....	8
8.3 Transportation.....	8
8.4 Stock.....	8
Annex A (informative) Tester and testing procedure for discharge property test	9
Bibliography	12

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 61, *Plastics*, Subcommittee SC 14, *Environmental aspects*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Poly(lactic acid) (PLA) is a thermoplastic polymer material that is commonly used in additive manufacturing/3D Printing. This document specifically addresses the following:

- a) specify various parameters such as the appearance, dimensions, chemical and physical properties;
- b) this document is expected to improve the quality management of PLA based filament for additive manufacturing applications;
- c) provide information on end-of-life management, use of renewable biobased carbon feedstocks vs. fossil based feedstocks, Carbon and Environmental Footprint, and methodology of a circular economy.

The document is expected to provide benefits to both consumers and industry. Consumers may profit from this document by relying on standardized specification. This document is also important for the development and growth of a new environmentally responsible polymer material industry based on PLA.

Specifications for use of poly(lactic acid) based filament in additive manufacturing applications

1 Scope

This document specifies the technical requirements, test methods, detection rules, marking/labelling, packaging, transportation and storage of poly(lactic acid) (PLA) based filament for use in specific additive manufacturing technology, such as materials extrusion (MEX).

The document applies to PLA based filament for MEX additive manufacturing applications.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

[ISO 291](#), *Plastics — Standard atmospheres for conditioning and testing*

[ISO 527-2](#), *Plastics — Determination of tensile properties — Part 2: Test conditions for moulding and extrusion plastics*

[ISO 1133-1:2022](#), *Plastics — Determination of the melt mass-flow rate (MFR) and the melt volume-flow rate (MVR) of thermoplastics — Part 1: Standard method*

ISO 2859-1, *Sampling procedures for inspection by attributes — Part 1: Sampling schemes indexed by acceptance quality limit (AQL) for lot-by-lot inspection*

[ISO 8124-3](#), *Safety of toys — Part 3: Migration of certain elements*

[ISO 12219-2](#), *Interior air of road vehicles — Part 2: Screening method for the determination of the emissions of volatile organic compounds from vehicle interior parts and materials — Bag method*

[ISO 15512:2019](#), *Plastics — Determination of water content*

ISO 16620 (all parts), *Plastics — Biobased content*

ISO 22526 (all parts), *Plastics — Carbon and environmental footprint of biobased plastics*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1 additive manufacturing AM

process of joining materials to make parts from 3D model data, usually layer upon layer, as opposed to subtractive manufacturing and formative manufacturing methodologies

Note 1 to entry: This is also commonly referred to as 3D-printing.

[SOURCE: ISO/ASTM 52900:2021, 3.1.2, modified — Note 1 to entry replaced and Note 2 to entry removed.]

3.2

material extrusion

MEX

additive manufacturing (3.1) process, where an object is built by selectively depositing melted material in a pre-determined path layer-by-layer

Note 1 to entry: More specifically, MEX, refers to a process in which a filament material (i.e. PLA) is heated to melt in a printer and extruded through a nozzle (with certain bore diameter), that moves following a preset computer slice model to continuously deposit a layer on, and bond to a previous layer after solidification to form the final product.

3.3

melt mass-flow rate

MFR

rate of extrusion of a molten resin through a die of specified length and diameter under prescribed conditions of temperature, load and piston position in the cylinder of an extrusion plastometer

Note 1 to entry: The rate is determined as the mass extruded over a specified time.

Note 2 to entry: MFR can be expressed in milligrams per second (mg/s) or grams per 10 min (g/10 min).

3.4

total volatile organic compounds

TVOC

group of compounds that are present in emissions or ambient air, which include benzene, toluene, butyl acetate, ethylbenzene, *p*-(*m*-)xylene, styrene, *o*-xylene, undecane, etc.

Note 1 to entry: Indoor building and decoration materials are the main sources of TVOC in the air.

3.5

3D printing

3DP

type of rapid prototyping and digital model file-based technology using powdered metal or plastic and other adhesive materials to construct object layer-by-layer

4 Labelling

The product shall be labelled with the specifications: barcode, country of production, build temperature, name of material, 3D filament, colour and net mass as shown in [Figure 1](#).

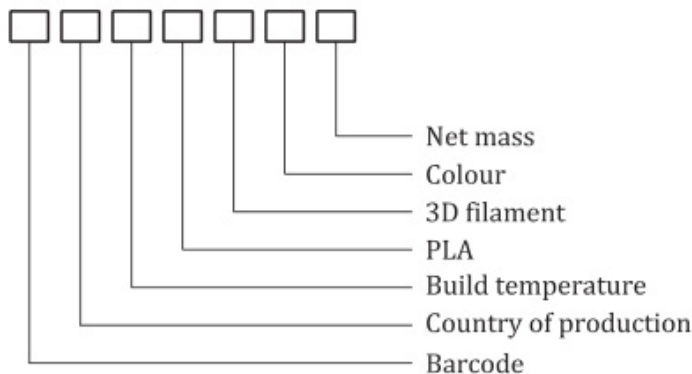


Figure 1 — Labelling of product

EXAMPLE A blue PLA filament material having diameter of 1,75 mm, with net mass of 1 kg shall be designated as 1,75 mm PLA 3D filament blue: 1 kg as shown in [Figure 2](#).

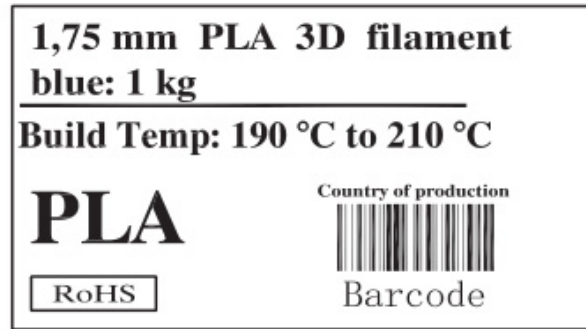


Figure 2 — Label example

5 Requirements

5.1 Appearance

In general, the filament material shall be of uniform colour consistency, without burrs, protuberances, visible crease, scratches, or bubbles. However, filaments can also be multicolour or contain foreign matter such as foaming agents, fillers, metals powders and cellulose particles. The filament material shall be of uniform colour consistency if marked as a single colour filament. In the case of multicolour filament, two or three basic colours should be mentioned.

Appearance requirements shall be assessed in accordance with [6.2](#).

5.2 Specification

5.2.1 Diameter and ovality tolerance

Filament diameters of 1,75 mm and 2,85 mm are the most common (80 % to 90 %) of filament produced. Other diameter sizes can also occur. Filament diameter and filament ovality shall meet the requirements of [Table 1](#), when measured according to [6.3](#).

Table 1 — Diameter and roundness

Nominal diameter (ND)	Tolerance		Ovality
	Premium product	Qualified product	
2,85 mm	±0,03 mm	±0,05 mm	≤0,07 mm
1,75 mm	±0,03 mm	±0,03 mm	≤0,05 mm
Other values	±1,7 %ND	±1,1 %ND	≤±2,6 %ND

NOTE Filament products are classified into premium products and qualified products based on nominal diameter tolerance and ovality tolerance.

5.2.2 Net mass and tolerance

The net mass of filament shall be 0,5 kg or 1,0 kg with tolerance of +3 % when measured according to [6.4](#). Spools can range from 0,75 kg to 6 kg.

5.2.3 Volatile matter limit

Follow the reporting requirements in [ISO 12219-2](#).

5.2.4 Biobased (carbon) content

Follow the reporting requirements in the [ISO 16620](#) series.

5.2.5 Carbon and environmental footprint

Follow the reporting requirements in the [ISO 22526](#) series.

5.3 Property requirements

Filament shall meet the property requirements in [Table 2](#).

Table 2 — Properties of filament

Item	Requirements	Test method
Build temperature	(200 ± 20) °C	Device settings
Moisture content	≤0,5 %	6.6
Line tensile load	1,75 mm	≥125 N 6.7
	2,85 mm	≥340 N 6.7
	Other value	Negotiated by manufacture and user
Line elongation at break	1,75 mm	≥10 % 6.7
	2,85 mm	≥6 % 6.7
	Other value	Negotiated by manufacture and user

5.4 Limit quantity of substances and impurities

Appropriate limitations should be met according to, for example, [ISO 8124](#), [ISO 17088](#), etc.

6 Test methods

6.1 Conditioning

Conditioning of filament samples on the spool shall be done according to [ISO 291](#) under condition of 23 °C ± 2 °C. The time of conditioning shall be at least 48 h, but no longer than 96 h.

6.2 Appearance of filament material

Take a whole roll of the sample, under the condition of sufficient light with the help of a magnifying glass, the eyes are (30~50) cm away from the sample to directly observe the colour difference, burr, protrusion, creases, foreign bodies, scratches, bubbles, etc. of the sample, and the observation time is (2 s~3 s). A colour chart shall be used.

6.3 Diameter and ovality of filament material

Use a micrometer or other non-contact detection tool such as an infrared calliper or a laser calliper with an error limit of 0,001 mm.

The filament diameter shall be measured by at least three different directions, at least 50° apart. All values shall attend the diameter tolerance.

The ovality is measured by measuring diameters of at least three different directions, at least 50° apart, and by subtracting the minimum value from the maximum value.

The ovality result is used to determine whether the filament is cylindrical, and the basis for the determination shall meet the ovality requirements in [Table 1](#).

6.4 Net mass and tolerance of filament material

This shall be measured by using a calibrated balance with maximum error limit no larger than 0,001 kg.

6.5 Melt mass-flow rate

Measure melt mass-flow rate method A of [ISO 1133-1](#) under test condition D [temperature (190 ± 1) °C, load $(2,16 \pm 0,01)$ kg].

6.6 Moisture content

6.6.1 General

Moisture content shall be measured using one of the following methods given in [6.6.2](#) to [6.6.4](#).

6.6.2 Method A

Measure moisture in accordance with [ISO 15512:2019](#), method B.

6.6.3 Method B

Take $(10,0 \pm 0,5)$ g of sample and spread it on the bottom of the weighing pan and place it in a halogen fast moisture meter whose temperature is raised to (105 ± 1) °C. Press the "Display" key to allow an 80 s of judgment before the moisture measurement is completed, when the instrument will automatically stop heating, and an alarm will sound to record the display data in the form of a % sign. Each sample was tested at least three times and the average value taken.

6.6.4 Method C

Take 1,0 g of sample (tolerance of $\pm 0,1$ g), put it in weighing bottle (w_2) that was dried to constant mass at (110 ± 1) °C and heat the bottle at (70 ± 1) °C for 4 h in a dryer before cooling to room temperature and weigh it (w_1). Moisture content shall be calculated using [Formula \(1\)](#).

$$\Delta w = \frac{w - (w_1 - w_2)}{w} \times 100 \% \quad (1)$$

where

Δw is the moisture content, expressed as a percentage (%);

w is the measured mass of sample, in gram (g);

w_1 is the mass of sample and weighing bottle after cooling to room temperature, in gram (g);

w_2 is the mass of weighing bottle, in gram (g).

In an arbitration experiment, the moisture test shall be carried out according to Method C.

6.7 Tensile load and elongation at break of filament

Take filament test sample directly with fixture spacing of (350 ± 5) mm for testing in accordance with [ISO 527-2](#) at a tensile speed of (50 ± 2) mm/min. Five test samples shall be tested and the average is reported as result. The numerical deviation of the 5 samples should be no more than 20 % from the mean value.

6.8 Impurities limit

Measurement of impurities content shall be performed according to [ISO 8124-3](#).

6.9 Volatile matter limit

Measurement of formaldehyde, xylene, styrene and other TVOC shall be done in accordance with [ISO 12219-2](#).

6.10 Biobased (carbon) content

Report on biobased (carbon) content using the ISO 16620 series.

6.11 Carbon and environmental footprint

Report on the carbon and environmental footprint of the filament material and/or the target product made by 3D printing/AM using the ISO 22526 series.

6.12 End-of-life options

Options for the filament waste could be industrial composting, mechanical recycling, or chemical depolymerization.

One should consider application appropriateness for end-of-life options. If products are being designed with industrial composting as end of life, they should comply separately to the appropriate compostability standard (e.g. [ISO 17088](#)).

6.13 Discharge ability

This test is optional (see [Annex A](#))

7 Verification

7.1 General

Unless required for specific applications, for example, as absorbable material for implant manufacturing, material verification shall be done according to [7.2](#) to [7.3](#).

7.2 Sampling

7.2.1 General

Samples for testing shall be drawn randomly in accordance with ISO 2859-1, adopting single sampling plan for normal inspection, by general inspection level I and acceptance level 6,5 (see [Table 3](#)).

Table 3 — Sampling scheme

Unit: roll

Lot size	Sample size	Acceptance number	Rejection number
		<i>Ac</i>	<i>Re</i>
Up to 15	2	0	1
	2	-	-
16 to 25	3	-	-
	3	0	1

Lot size	Sample size	Acceptance number	Rejection number
		<i>Ac</i>	<i>Re</i>
26 to 90	5	-	-
	5	-	-
91 to 150	8	1	2
	8	-	-
151 to 280	13	2	3
	13	1	2
281 to 500	20	3	4
	20	2	3
501 to 1 200	32	5	6
	32	3	4
1 201 to 3 200	50	7	8
	50	5	6
>3 200	80	10	11
	80	8	9

7.2.2 Determination of acceptability

The sample size for the first inspection should be equal to the first sample size given by the protocol. If the number of nonconforming items found in the first sample is less than or equal to the first acceptance number, the lot shall be considered acceptable; if the number of nonconforming items found in the first sample is greater than or equal to the first rejection number, the batch should be considered unacceptable. If the number of nonconforming items found in the first sample is between the first accepted and the first rejected, a second sample of the sample size given by the protocol shall be inspected and accumulated in the first and second samples the number of nonconforming items found. If the cumulative number of non-conforming products is less than one thousand or equal to the second acceptance number, the batch is determined to be acceptable; if the cumulative number of non-conforming products is greater than or equal to the second rejection number, the batch is determined to be unacceptable.

7.3 Type inspection

Type inspection shall include checking all the items specified in this document and shall be undertaken in case of one of the following:

- a) trial production of new product and finalization of products;
- b) when the raw material, formula and production line are changed, which may influence the properties of products;
- c) in-cycle periodic inspection during normal production process or after a certain number of products have been accumulated (at least one time a year);
- d) when production resumes after suspension of production for more than half a year;
- e) when the delivery inspection is significantly different from the last type of inspection.

8 Mark, packaging, transportation and stock

8.1 Mark

The external packaging shall have obvious marks including trademark, name and address of manufacturer, standard number, product name, specification, batch number and net content.

以上内容仅为本文档的试下载部分，为可阅读页数的一半内容。如要下载或阅读全文，请访问：<https://d.book118.com/815222243243011211>